

FP20401B-4-1

Preselector, 1 MHz, compact, surface mount, BNC Female, 174-222 MHz

(FP20401B*4-1)

- Suitable for most standard multicoupling requirements
- Can be mounted directly on 1.75 " high receiver multicoupler tray
- Rugged compact construction with BNC type female connectors

The 'FP' series preselector filters are compact units that are suitable for most standard receiver multicoupling requirements. Their size permits them to be mounted directly on the 1-3/4 in (44.5 mm) high receiver multicoupler trays.



www.sincltech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1223 42 03 03	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sincltech.com	salesuk@sincltech.com	salesla@sincltech.com	salescan@sincltech.com

Product Specification Sheet
EPR 017600

FP20401B-4-1

Issue: 45

Dated: 03-02-10
Dated: 01-05-02

Notes


*1 : 2.5 MHz also available

Electrical Specifications

Frequency Range	MHz	220 to 222	
Insertion loss (max) Tx to Ant	dB	2.8	
Input VSWR (max)		1.5:1	
Input Connectors		BNC (female)	
Output Connectors		BNC (female)	
Approx Bandwidth @ 50 dB	MHz	12	
Bandwidth at specified insertion loss	MHz	1	*1

Mechanical Specifications

Length/ Height	in (mm)	1.3 (33)
Width	in (mm)	4.2 (107)
Depth	in (mm)	4.9 (124)
Weight	lbs (kg)	1.1 (0.5)
Actual Shipping weight	lbs (kg)	2 (0.9)
Shipping dimensions	in (mm)	13x9x3 (330x229x76)

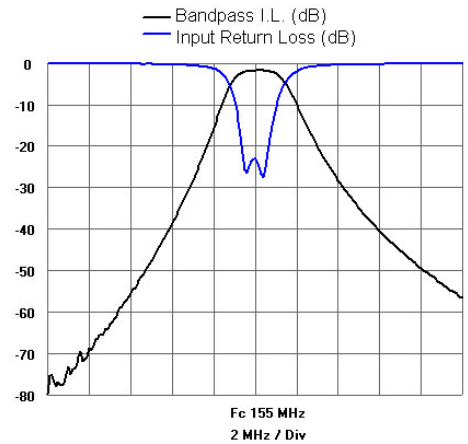

Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------